


Leaflet on DALI Gateway

Integrate CASAMBI-compatible luminaires into a third-party system such as KNX, Loxone, Crestron.
It is mandatory to use a CBU-DCS DALI Gateway.

If the CBU-DCS DALI Gateway profile is not displayed, the following profile 9000 DALI Gateway must be loaded under Change profile before coupling.

Afterwards the DALI Gateway is displayed in the network under More --> Gateway.

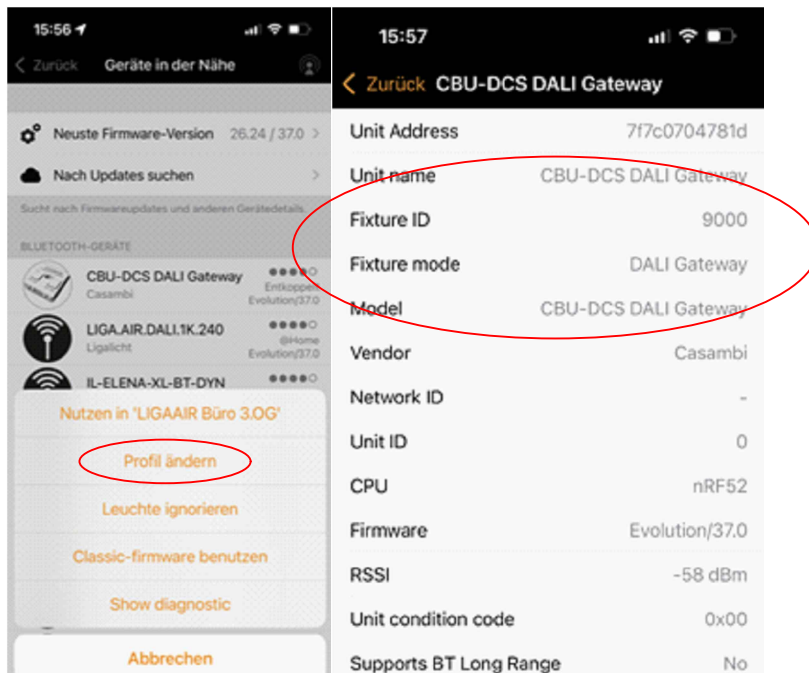

Occhio lights Mito cosmo & Mito sospeso move

Load fixture ID 30306 (Scene Control).

Settings see tips and tricks PDF Occhio DALI Gateway with Scene Control



LIGA AIR

LICHTTEAM AG
Stationsstrasse 89
6023 Rothenburg

+41 41 280 57 57
mail@ligaair.ch
www.ligaair.ch

