


1 power supply unit


12VDC up to max. 800W max. 60A.

24-48VDC up to max. 1200W and 50A/25A (total of all channels 1-5)

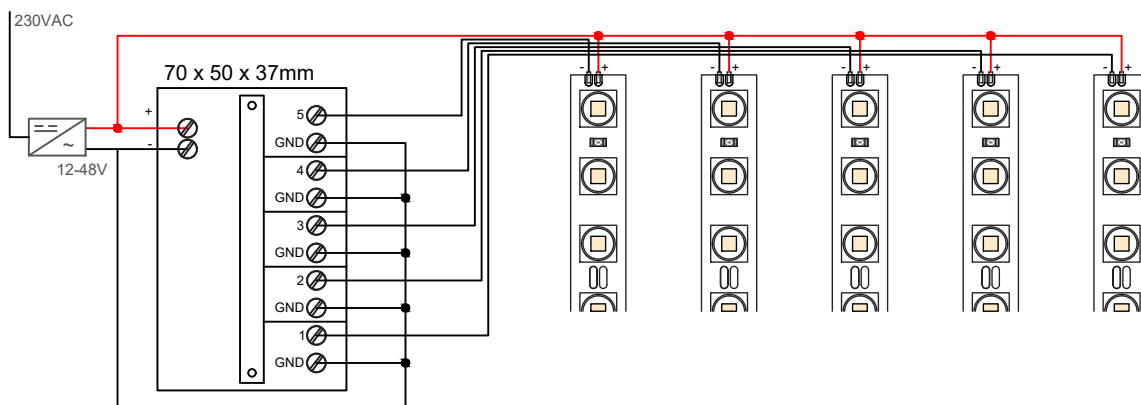

Multiple power supplies

At 24VDC max. 5 power supplies at 240W / 10A

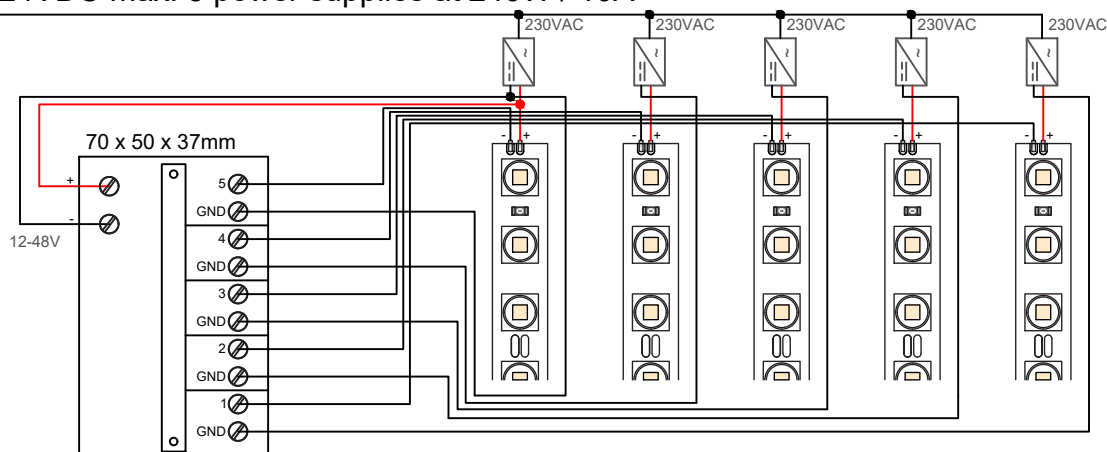

Model	PWM 1	PWM 2	PWM 3	PWM 4	PWM 5	PWM configuration (+: parallel, /: separate)
LA.PWM5-1CH/DIM	DIM 1	DIM 1	DIM 1	DIM 1	DIM 1	1+2+3+4+5
LA.PWM5-2CH/2xDIM	DIM 1	DIM 1	DIM 1	DIM 2	DIM 2	1+2+3 / 4+5
LA.PWM5-2CH/DIM/TW	WW	WW	WW	DW	DW	1+2+3 / 4+5
LA.PWM5-3CH/3xDIM	DIM 1	DIM 1	DIM 2	DIM 2	DIM 3	1+2 / 3+4 / 5
LA.PWM5-3CH/DIM,RGB	R	G	B			1 / 2 / 3
LA.PWM5-4CH/4xDIM	DIM 1	DIM 2	DIM 3	DIM 4		1 / 2 / 3 / 4
LA.PWM5-4CH/DIM,RGBW	R	G	B	W		1 / 2 / 3 / 4+5
LA.PWM5-4CH/DIM,RGB/W	R	G	B	W		1 / 2 / 3 / 4+5
LA.PWM5-4CH/2x(DIM,TW)	WW 1	DW 1	WW 2	DW 2		1 / 2 / 3 / 4
LA.PWM5-5CH/DIM,RGBWW(TW)	R	G	B	WW	DW	1 / 2 / 3 / 4 / 5
LA.PWM5-5CH/DIM,RGBWW(TW)-NEW	R	G	B	WW	DW	1 / 2 / 3 / 4 / 5
LA.PWM5-5CH/5xDIM	DIM 1	DIM 2	DIM 3	DIM 4	DIM 5	1 / 2 / 3 / 4 / 5

Wiring Diagram: LIGA air module (profiled)

Luminaire Model: ...

Control: 5-channel PWM switching dimmer 12VDC / 800W, 24V-48VDC / 1200W

LIGA.AIR.PWM5

V1.0 / 01.10.2025



LIGAAIR

LICHTTEAM AG
Stationsstrasse 89
CH-6023 Rothenburg
SWITZERLAND

+41 41 280 57 57
mail@ligaair.ch
www.ligaair.ch

